

CHAPTER 1

INTRODUCTION

The 8 channels SSR relay output / photo isolator input board for pocket DIO provides SSR relay output functions and photo isolator input functions. The SSR relay output part provides 8 solid-state (SSR) relays to drive 8 different output channels. Each relay channel can be used to control ON / OFF of external devices, to drive external high power relays, to activate alarms ... etc.

The photo isolator input part provides 8 photo couple digital input channels, which allow the input signals to be completely floated and prevent the ground loop.

The features of 8 channels SSR output / 8 channels photo isolator input board are:

- Support 8 SSR relay output channels and 8 photo couple input channels.
- The SSR operation characteristics are similar to relay.
- Provides more than 12 types of SSR output module.
- The Normal Open (NO) and Common contacts (COM) of



each relay is brought out to the screw connector.


- Allow the photo input signals to be completely floated and prevent the ground loops.
- Input current : 80mA maximum for each isolated input.
- Input voltage : 15V DC maximum for each isolated input.
- LED indicates when corresponds channel is activated.
- Isolated or non-isolated modes selectable.
- Operating temperature 0 to 60 °C.
- Storage temperature -20 to 70 degree °C.
- Humidity 5% to 95% in non-condensing.

1. Terminal Board

The figure of pocket DIO terminal board is shown on the following page.





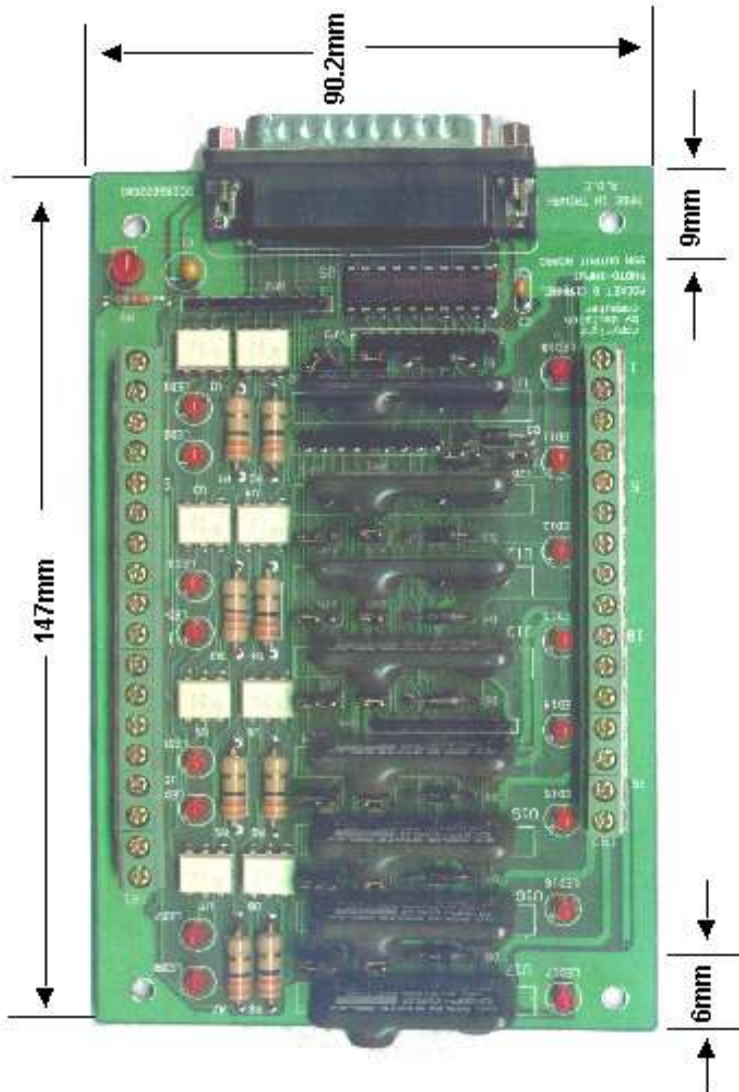


CHAPTER 2 HARDWARE CONFIGURATION

Before you use the terminal board, you must be sure to have this board plugged into pocket DIO.


The LED9 in terminal board shows the power on status. When it turns to light, we have power to this board, otherwise when it does not light, no power is provided.

The Jumpers are used to select isolated or non-isolated mode, when open the jumpers, it sets to isolated mode, otherwise when short the jumpers, it sets to non-isolated mode. JP1A and JP1B correspond to channel 0, JP2A and JP2B correspond to channel 1, etc. When set to non-isolated mode, the IxL is short to system ground. (where x is the channel number)

JP1B



JP1A



2.2. Pin Assignment of T1

Pin	Description	Pin	Description
1	GND	14	+5V
2	DI0	15	GND
3	DI1	16	GND
4	DI2	17	GND
5	DI3	18	GND
6	DI4	19	GND
7	DI5	20	DO3
8	DI6	21	DO4
9	DI7	22	DO5
10	DO0	23	DO6
11	DO1	24	DO7
12	DO2	25	+5V
13	GND		

2.3. Pin Assignment of TB1 (Photo Isolator)

Pin	Description
1	I0H
2	I0L
3	I1H
4	I1L
5	I2H
6	I2L
7	I3H
8	I3L
9	I4H

10	I4L
11	I5H
12	I5L
13	I6H
14	I6L
15	I7H
16	I7L

2.4. Pin Assignment of TB2 (Relay Output)

Pin	Description
1	COM0



2	OTO0
3	COM1
4	OTO1
5	COM2
6	OTO2
7	COM3
8	OTO3
9	COM4
10	OTO4
11	COM5
12	OTO5
13	COM6
14	OTO6
15	COM7
16	OTO7

APPENDIX A

WARRANTY INFORMATION

1. Copyright



Copyright 1996 DECISION COMPUTER INTERNATIONAL CO., LTD. all rights reserved. No part of POCKET ADDIO software and manual may be reproduced, transmitted, transcribed, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, without the prior written permission of DECISION COMPUTER INTERNATIONAL CO., LTD.

Each piece of POCKET ADDIO package permits user to use POCKET ADDIO only on a single computer, a registered user may use the program on a different computer, but may not use the program on more than one computer at the same time.

Corporate licensing agreements allow duplication and distribution of specific number of copies within the licensed institution. Duplication of multiple copies is not allowed except through execution of a licensing agreement. Welcome call for details.

2. Warranty Information

POCKET ADDIO warrants that for a period of one year from the



date of purchase (unless otherwise specified in the warranty card) that the goods supplied will perform according to the specifications defined in the user manual. Furthermore, the POCKET ADDIO product will be supplied free from defects in materials and workmanship and be fully functional under normal usage.

In the event of the failure of a POCKET ADDIO product within the specified warranty period, POCKET ADDIO will, at its option, replace or repair the item at no additional charge. This limited warranty does not cover damage resulting from incorrect use, electrical interference, accident, or modification of the product.

All goods returned for warranty repair must have the serial number intact. Goods without serial numbers attached will not be covered by the warranty.

Transportation costs for goods returned must be paid by the purchaser. Repaired goods will be dispatched at the expense of POCKET ADDIO.

To ensure that your POCKET ADDIO product is covered by the warranty provisions, it is necessary that you return the Warranty card.

Under this Limited Warranty, POCKET ADDIO's obligations



will be limited to repair or replacement only, of goods found to be defective as specified above during the warranty period. POCKET ADDIO is not liable to the purchaser for any damages or losses of any kind, through the use of, or inability to use, the POCKET ADDIO product.

POCKET ADDIO reserves the right to determine what constitutes warranty repair or replacement.

Return Authorization: It is necessary that any returned goods are clearly marked with an RA number that has been issued by POCKET ADDIO. Goods returned without this authorization will not be attended to.

